


# SP Series LED Poster



P1.5/P1.8/P2/P2.5/P3

Seamless cascading

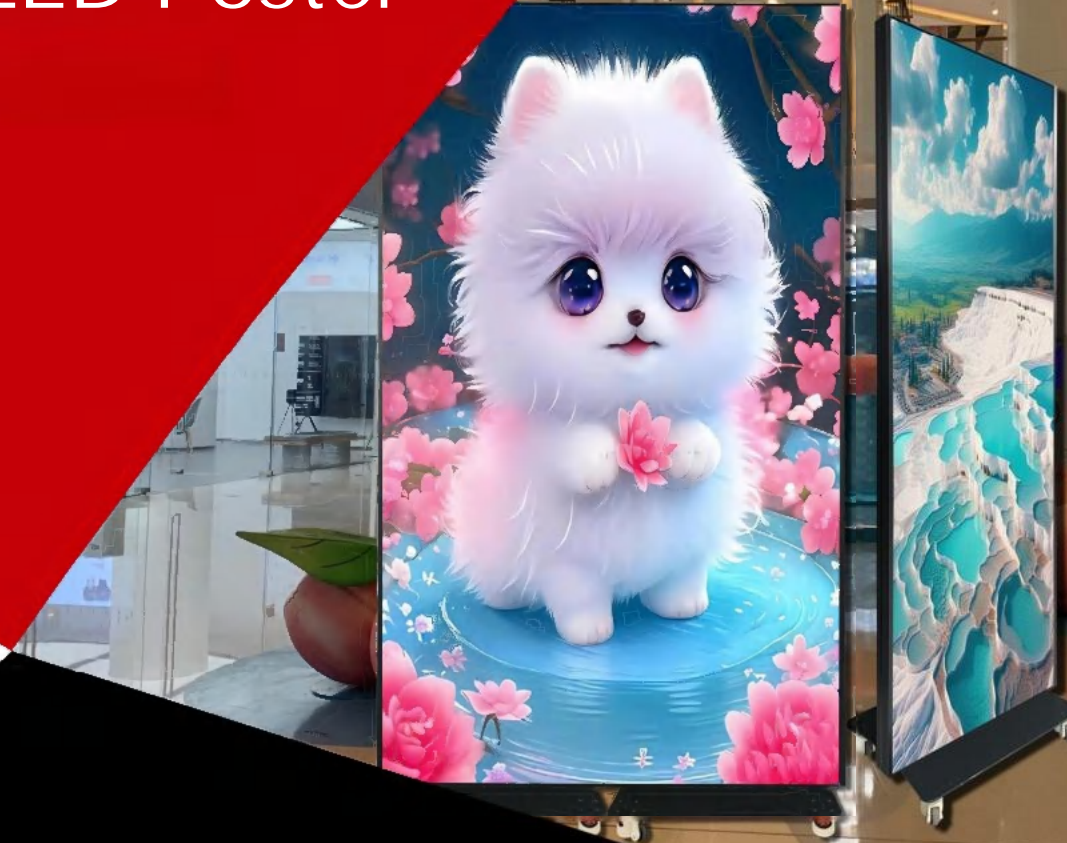

Plug & Play



light



High Contrast



Seamless





Front Service



Wireless Remote Control

★ Easy to install and maintain, magnet modules can remove in front quickly


★ Remote control via wifi or internet, content can be real-time updated by your phone or computer no matter where you are

★ Magnet foldable blade, the bezel can be freely unfolded to backside when cascading the posters

★ High brightness, high contrast and vivid color make sharper imaging can catch more eyes than traditional LCD poster

# Product details

Magnet module

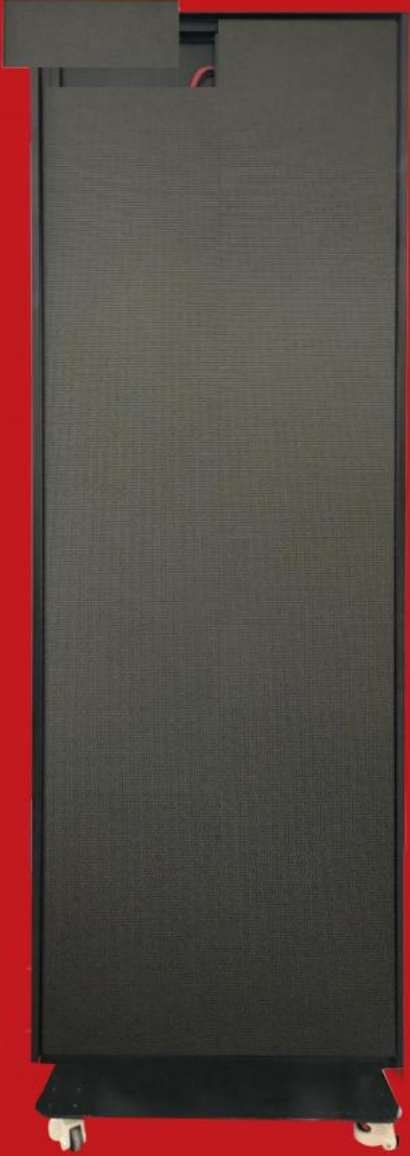

Signal in  
Power in



Fodable Bezel

Side lock



## Seamless Cascading

1. Fold the side bezel can be folded to back.
2. Lock each poster by the side lock.
3. Up to 8 posters can be cascaded to a big seamless video wall



Standard Package  
Roadcase 1in1 or 2in1



Model No.	SP1.5	SP1.8	SP2.0	SP2.5	SP3.0
Pixel Pitch	1.538mm	1.86mm	2mm	2.5mm	3.076mm
LED Type	SMD1212	SMD1515	SMD1515	SMD1515/2020	SMD2020
Physical Density	519168 dots	355008 dots	307200 dots	196608 dots	129792 dots
Module Size	320*160mm				
Pixel Resolution	208*104=21632 dots	172*86=14792 dots	160*80 =12800dots	128*64=8192 dots	104*52=5408 dots
Module Thickness	15mm				
Weight	0.5kg				
Max Power	25W				
Scan Mode	1/52S	1/43S	1/40S	1/32S	1/26S
Screen Size	640*1920*60mm				
Screen Weight	44kg/98LB				
Screen Resolution	416*1248=519168dots	344*1032=355008dots	320*960=307200dots	256*768=196608dots	208*624=129792dots
Number of Modules	24pcs				
Viewing Distance	1.5-50m	2-50m	2-50m	2-50m	3-50m
Frame Frequency	60Hz				
Refresh Rate	≥3840Hz				
Pixel Configuration	1R1G1B				
Brightness	≥800cd/m <sup>2</sup>	≥800cd/m <sup>2</sup>	≥800cd/m <sup>2</sup>	≥800cd/m <sup>2</sup>	≥800cd/m <sup>2</sup>
Number of Power Supplies	2pcs				

Power Supplies details	5V/80A*2 pcs				
Average Power Consumption	130W				
Max. Power consumption	550W				
Protection Rank	IP31				
Extra Protection	Protection Painting on PCB				
Working Voltage	DC 5V				
Operating Temperature	-20 ~ +50°C				
Life Span	>1000000h				
Failure Rate	<0.0001				
MBTF	>5000h				
Service Type	Front				
Viewing Angle	H:160°, V:160°	H:160°, V:160°	H:140°, V:140°	H:140°, V:140°	H:140°, V:140°
Connectivity	Wifi / Internet Port / USB				
Operation Method	Apple/Android APP / Windows Software				



Email us: [sales@vtled.com](mailto:sales@vtled.com)  
 Visiting us: [www.vtled.com](http://www.vtled.com)